


QTY.	PRODUCT	NEXT ASSY. DWG.	NO.	DESCRIPTION OF CHANGE	SCO#	DATE	BY
			0	NEW ISSUE		12/8/11	DSE
			1	Corrected compressed air ratings.		07/10/12	DSE
			2	Filter Element Updated		09/02/15	DSE
			3	Side Supports Updated		11/16/17	DSE
			4				

NO. RFT064/10
SUPPDS.

Compact Filter Element Type 18.0 PTF 24, MERV Rating = 16/18 (F9/H13), 52 pleats, aprox 24 mm Pleat Height, Hard PU top and bottom, including $\phi 10 \times 1040$ mm packing o-ring.

It is recommended that the compressed air for the cleaning/purge cycle be set at an operating range of 4 to 5 bar, 5 bar being the MAXIMUM.

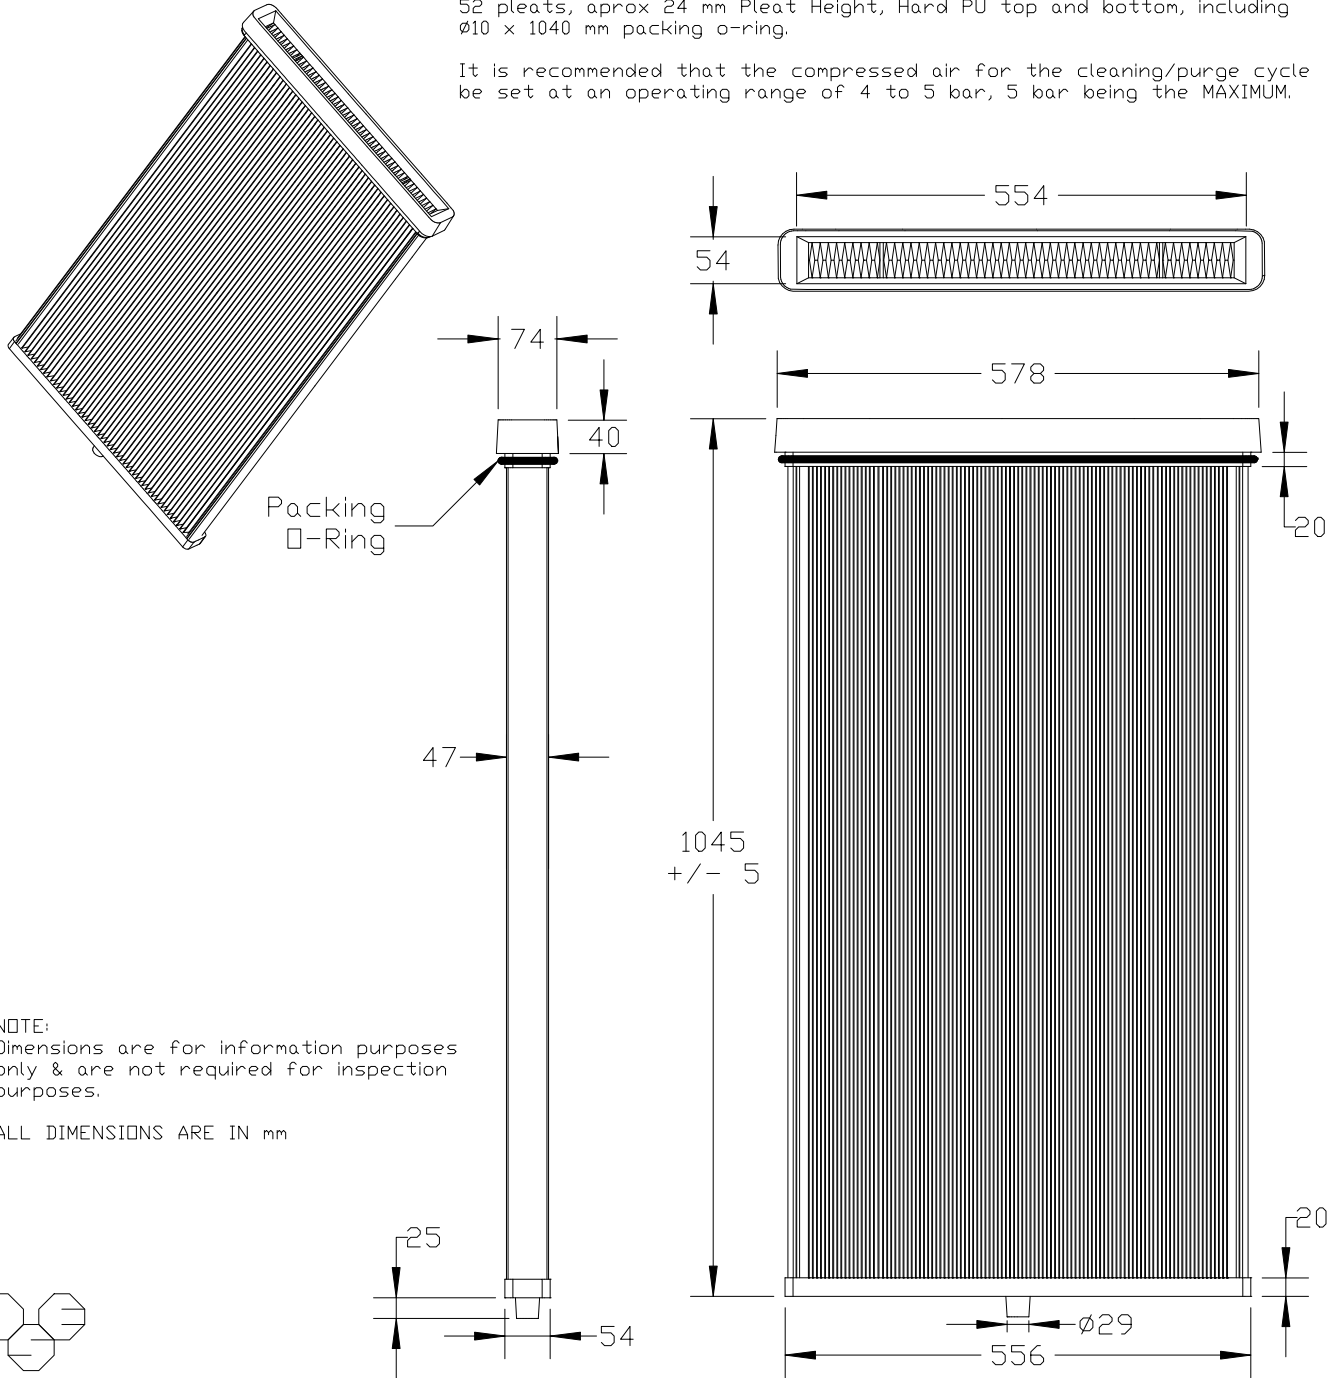

NOTE:
Dimensions are for information purposes only & are not required for inspection purposes.

ALL DIMENSIONS ARE IN mm



ITEM#	QTY	PART NUMBER	DESCRIPTION
TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS $\pm 1/64$ DECIMALS .X ± 1 .XXX ± 0.005 ANGLES $\pm 1/2^\circ$.XX ± 0.1 .XXX ± 0.005			THIS DOCUMENT IS THE PROPERTY OF RICHARDSON ELECTRONICS, LTD. AND SHALL NOT BE COPIED, REPRODUCED, USED IN THE MANUFACTURE OR SALE OF APPARATUS OR DISCLOSED TO OTHERS WITHOUT PERMISSION.
DO NOT SCALE DRAWING			Richardson Electronics, Ltd.
DRAWN	DSE	SCALE	NTS
ENG. MGR.		ENG. CHKD.	
ENG. MGR.		PRODN. APPD.	
MAT'L			
MAT'L SPEC. NO.	-		
FINISH	-	PROD.	
			NO. RFT064/10 CHANGE - 3