


NO. RFT484/125
 SUPS.DS.

QTY.	PRODUCT	NEXT ASSY. DWG.	NO.	DESCRIPTION OF CHANGE	SCO#	DATE	BY
			0	NEW ISSUE		02/13/13	DSE
			1				
			2				
			3				
			4				

GORE® SINBRAN® Filter elements Number of Filter Elements = 18

Continuous Operating Temp 70°C
 MAX Operating Temp 75°C
 Pressure Loss (new) High Flow 2mbar @ 2m/min
 High Efficiency 3 mbar @ 2m/min
 Emission At least test classification "M" according to BGIA
 Electrical Resistance ATEX version 10^8 Ohms
 Recommended Installation Vertical

NOTE:
 Dimensions are for identification purposes only & are not meant for inspection purposes.
 ALL DIMENSIONS ARE IN mm

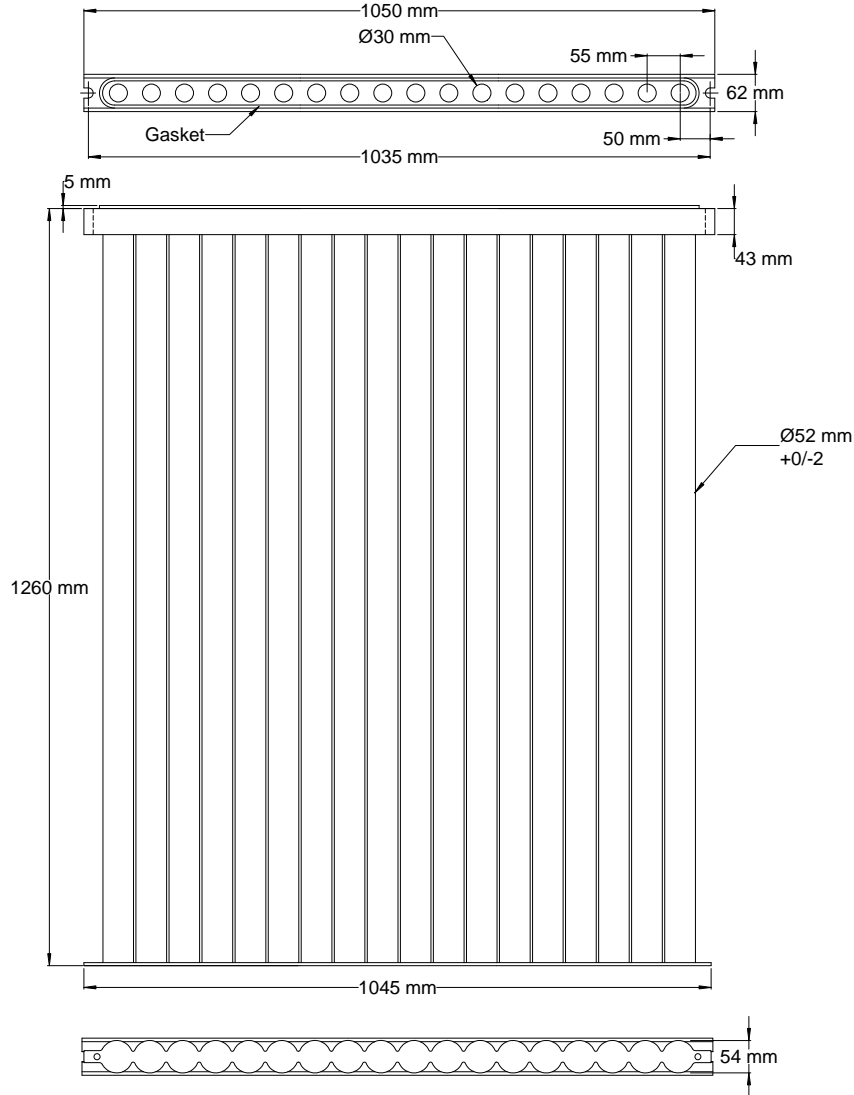

ITEM#	QTY	PART NUMBER	DESCRIPTION
TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS ±1/64 DECIMALS .X ±.1 .XXX ±.005 ANGLES ±1/2° .XX ±.01 .XXX ±.005			THIS DOCUMENT IS THE PROPERTY OF RICHARDSON ELECTRONICS, LTD. AND SHALL NOT BE COPIED, REPRODUCED, USED IN THE MANUFACTURE OR SALE OF APPARATUS OR DISCLOSED TO OTHERS WITHOUT PERMISSION.
DO NOT SCALE DRAWING			Richardson Electronics, Ltd.
DRAWN	DSE	SCALE	NTS
ENG. MGR.		ENG. CHKD.	
ENG. MGR.		PRODN. APPD.	
MAT'L			
MAT'L SPEC. NO.	—		
FINISH	—	PROD.	
			NO. RFT484/125 CHANGE — 0